
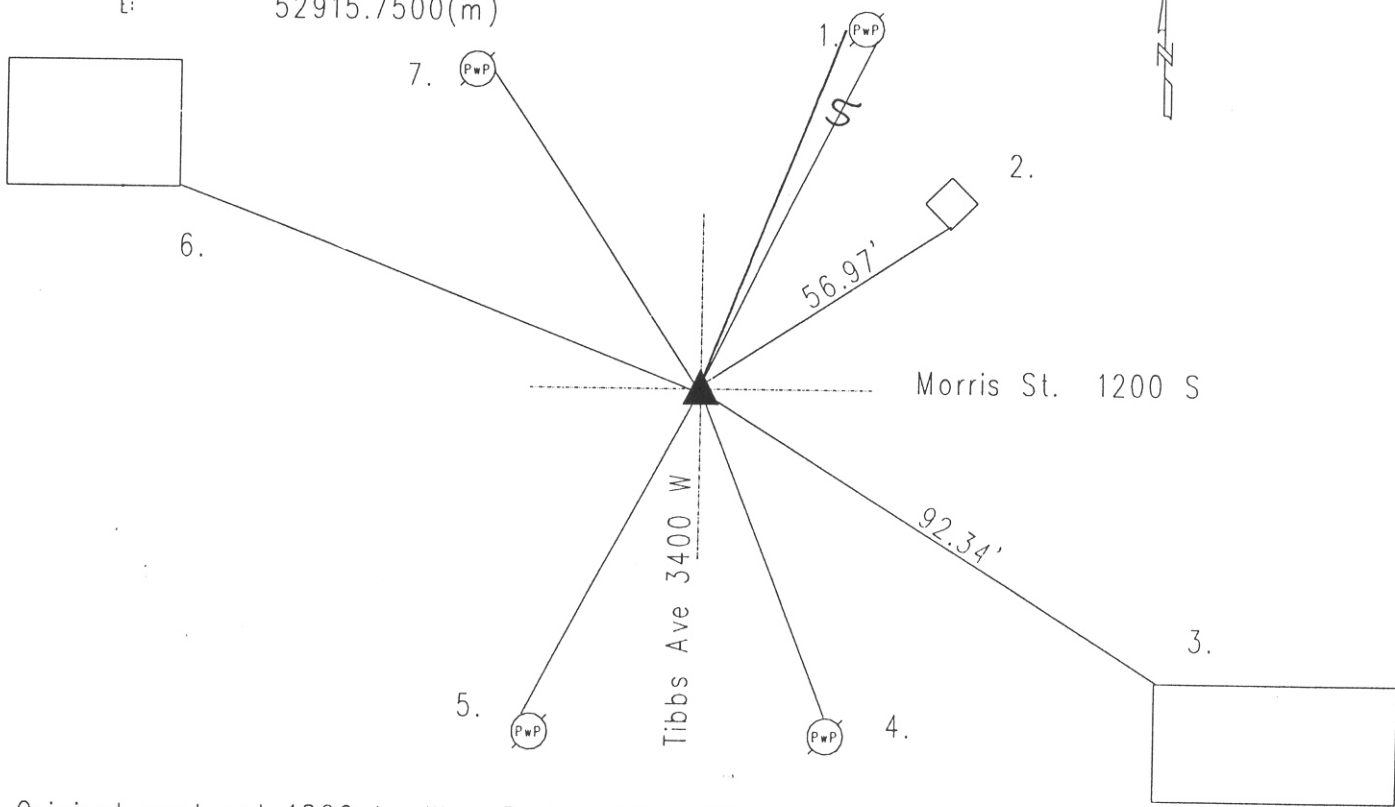


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 16 TOWNSHIP 15 RANGE 3
DATE: --8-4-99 10-11-04
PARTY CHIEF: Wilcoxon
CREW: _____
TYPE OF MARKER: Harrison
METHOD OF ESTABLISHMENT: County: 7-29-96

IN. S.P.C. E ZONE, NAD 83
NAME: 15031601
N: 499924.0030(m)
E: 52915.7500(m)

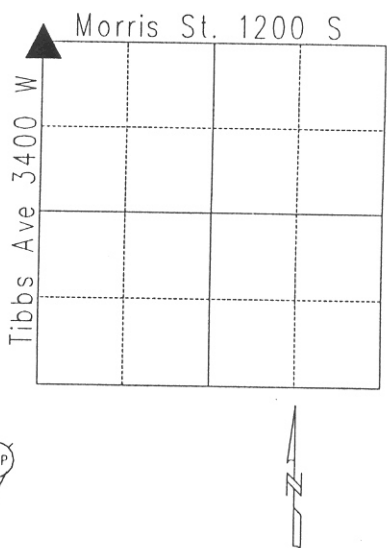

Original post set 1820 by Wm. B. Laughlin with witnesses: 18" sugar N 55 E 50 links, 14" dogwood S 57 W 42 links per Marion County Atlas pg. 6. Survey by Fatout 8-1-1877 indicates no stone nor witnesses per Wayne Township Legal Survey Book pg. 48. MCSO 1950 called a cross in pavement. Unversaw 6-16-55 called a brass plug. Monroe 1-22-58 called a PK nail over brass plug. Schmidt 9-21-61 called a PK nail. Steward 10-29-71 called a brass plug 4" down. MCSO 11-16-86 called a bolt over brass plug. Kiste 7-29-96 called a brass plug in poor shape removed and a 30" copperweld was set as the corner. Excavated 8-4-99 by Wilcoxon and a 30" copperweld was found 6" down. Harrison set.
HC 531601

REF.	DISTANCE	DESCRIPTION
1.	73.88'	PK nail SE PwP#1-560A 14"up (Land Science washer)
2.	56.97'	Southerly corner of storm grate
3.	92.34'	NW corner of "video store" store ADDRESS 3359
4.	55.20'	PK nail NE PwP#83-560B 6"up
5.	54.71'	PK nail NW PwP#68-599B 14"up
6.	84.31'	SE corner of brick wall "Ipls Foundry"
7.	55.76'	PK nail E PwP#293-559A